



## Glass Passivated Junction Rectifier

**Reverse Voltage**  
50 to 1000V  
**Forward Current** 1.0A

### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- Capable of meeting environmental standards of MIL-S-19500
- 1.0 Ampere operation at  $T_A = 75^\circ\text{C}$  with no thermal runaway
- Typical  $I_R$  less than  $0.1\mu\text{A}$
- High temperature soldering guaranteed:  $350^\circ\text{C}/10$  seconds,  $0.375"$  (9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data


**Case:** JEDEC DO-204AL, molded plastic over glass body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.012 oz., 0.3 g

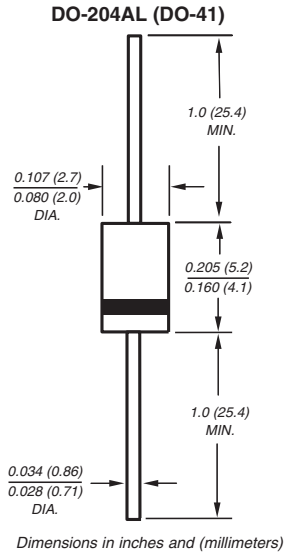

### Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	1N 4001G	1N 4002G	1N 4003G	1N 4004G	1N 4005G	1N 4006G	1N 4007G	Unit
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
* Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
* Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A = 75^\circ\text{C}$	$I_{F(AV)}$	1.0							A
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30							A
* Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length $T_A = 75^\circ\text{C}$	$I_{R(AV)}$	30							$\mu\text{A}$
Typical thermal resistance (Note 1)	$R_{\theta JA}$ $R_{\theta JL}$	55 25							$^\circ\text{C}/\text{W}$
* Operating junction and storage temperature range	$T_J, T_{STG}$	- 65 to +175							$^\circ\text{C}$

### Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.


Maximum instantaneous forward voltage at 1.0A	$V_F$	1.1	V
* Maximum DC reverse current at rated DC blocking voltage $T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$	$I_R$	5.0 50	$\mu\text{A}$
Typical reverse recovery time at $I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{rr} = 0.25\text{A}$	$t_{rr}$	2.0	$\mu\text{s}$
Typical junction capacitance at 4.0V, 1MHz	$C_J$	8.0	pF

**Notes:** (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted \*JEDEC registered values




## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


### Fig. 1 - Forward Current Derating Curve

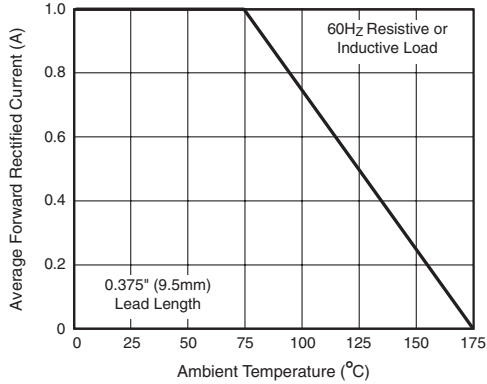


### Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

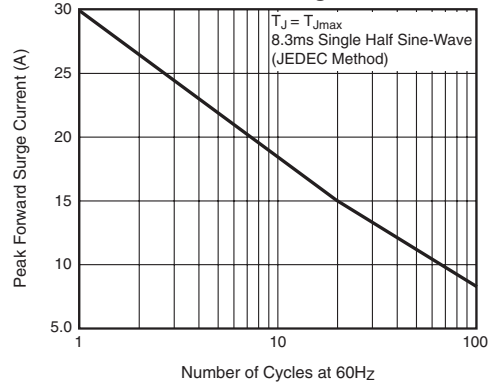


### Fig. 3 - Typical Instantaneous Forward Characteristics

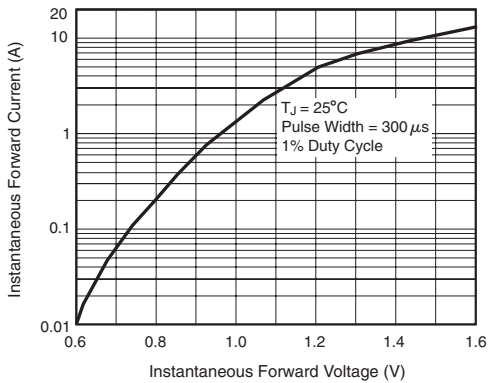

### Fig. 4 - Typical Reverse Characteristics

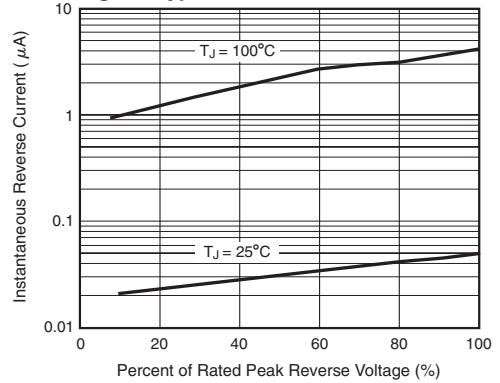

### Fig. 5 - Typical Junction Capacitance

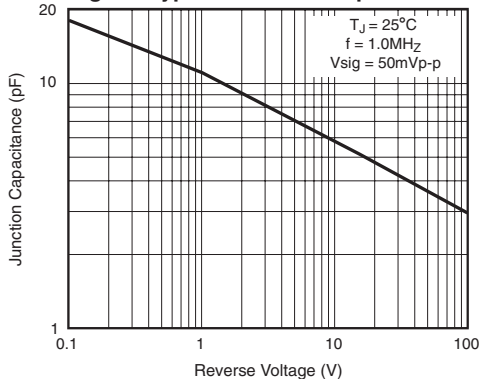

### Fig. 6 - Typical Transient Thermal Impedance

